COOLING TOWER

ALL STAINLESS STEEL COOLING TOWER

Application:

- Stainless Steel Construction
- · Suitable For Clean Liquid & Gases

Application:

Cooling tower is used for pressure transmitter for isolation of electronics from high process temperature. It can be used for temperature of 150°C to 220°C




Specifications:

Operating temperature Upto 220°C **Process Connection** : 1/4" BSP(M) Instrument Connection : 1/4" BSP(F) Material of Connection SS 316

Dimensions:

CT1 (PERFORATED TYPE)

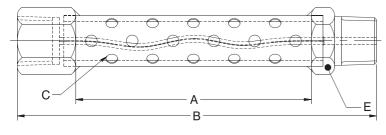

Α	В	E	С
101	154	A/F 25.0	Ø5.0, 44 HOLES

HOW TO ORDER

TYPE:

CT1

CT1 PERFORATED

MATERIAL OF CONSTRUCTION:

TL

TM AISI 316 SS AISI 316L SS

CONNECTION: 10B

06B 1/4" BSP (M x F) 06N 1/4" NPT (M x F) 10B 3/8" BSP (M x F) 10N 3/8" NPT (M x F) 1/2" BSP (M x F) 15N 1/2" NPT (M x F)

Note: Connections like PT/PF/Flaired /UNF/G/R etc.can be provided on request. Non standard connections can be provided through adaptors.

Ordering Example: CT1 - TL - 10B