

ALL STAINLESS STEEL COOLING TOWER

Application:

- Stainless Steel Construction
- Suitable For Clean Liquid & Gases

Application:


Cooling tower is used for pressure transmitter for isolation of electronics from high process temperature. It can be used for temperature of 150°C to 220°C



Specifications:

Operating temperature	: Upto 220°C
Process Connection	: 1/4" BSP(M)
Instrument Connection	: 1/4" BSP(F)
Material of Connection	: SS 316

Dimensions:

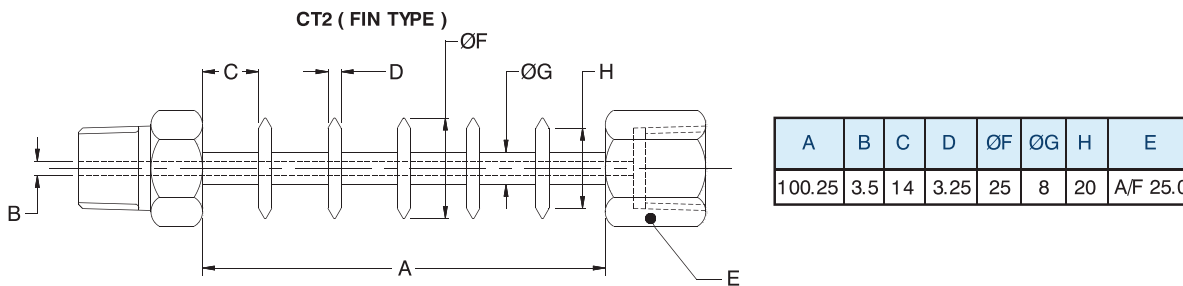

HOW TO ORDER

TYPE:

CT2 FIN TYPE

CT2

MATERIAL OF CONSTRUCTION:

TM AISI 316 SS

TL AISI 316L SS

TL

CONNECTION:

06B	1/4" BSP (M x F)	06N	1/4" NPT (M x F)
10B	3/8" BSP (M x F)	10N	3/8" NPT (M x F)
15B	1/2" BSP (M x F)	15N	1/2" NPT (M x F)

Note : Connections like PT/PF/Flaired /UNF/G/R etc.can be provided on request.
Non standard connections can be provided through adaptors.

10B

Ordering Example: CT2 - TL - 10B