CT3 COOLING TOWER

ALL STAINLESS STEEL COOLING TOWER

Application:

- · Stainless Steel Construction
- · Suitable For Clean Liquid & Gases

Application:


Cooling tower is used for pressure transmitter for isolation of electronics from high process temperature. It can be used for temperature of 150°C to 220°C



Specifications:

Operating temperature : Upto 150°C
Process Connection : 1/4" BSP(M)
Instrument Connection : 1/4" BSP(F)
Material of Connection : SS 316

Dimensions:

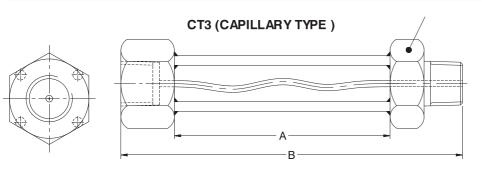

Α	В	E
101	137	A/F 36.0

HOW TO ORDER

CT3

CT3 CAPILLARY

MATERIAL OF CONSTRUCTION:

TM AISI 316 SS TL AISI 316L SS

Φ

CONNECTION:

 06B
 1/4" BSP (M x F)
 06N
 1/4" NPT (M x F)

 10B
 3/8" BSP (M x F)
 10N
 3/8" NPT (M x F)

 15B
 ½" BSP (M x F)
 15N
 ½" NPT (M x F)

Note: Connections like PT/PF/Flaired /UNF/G/R etc.can be provided on request. Non standard connections can be provided through adaptors.

Ordering Example: CT3 - TL - 10B

TL

10B