


## Flow Switch for Non Corrosive Liquids

### Applications:

The paddle type FSPT series with IP54 protection are designed to provide excellent performance where accuracy, reliability, and rugged construction are required used in liquid flow lines carrying water or any fluid neither harmful to brass and phosphor bronze nor classified as a hazardous fluids.

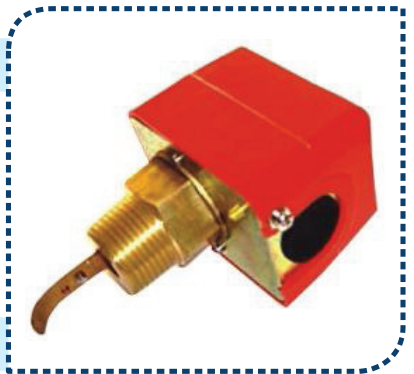


### Specifications:

Contact	SPDT	Max pressure	1.6MPa
Contact capacitance	220VAC/3A	Media temp.	5~80°C
Working temp.	5~100°C	Certification	CE

### Features:

	Range liter/min	D Band liter/min	Pipe		
			in	mm	
1	20~48	8	1	25	1
2	34~100	10	1.25	32	1
3	65~160	14	1.5	40	1
4	120~280	26	2	50	1
5	40~140	18	2	50	2
6	210~550	18	2.5	70	1
7	110~340	15	2.5	70	2
8	380~750	20	3	80	1
9	180~470	18	3	80	2
10	115~220	20	3	80	3
11	350~920	20	4	100	2
12	210~590	20	4	100	3
13	380~1200	40	5	125	3

### Dimension (mm):

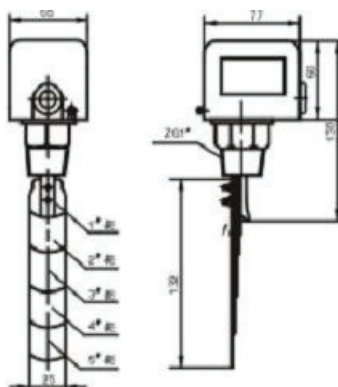

### Contact Principle:

