


OD6mm X 200mm Probe Temp Sensor

⚙️ Description:

Omicron Sensing Inc manufactures temperature sensors
This document shows the enclosures and temperature vs resistance curves for the standard sensors.

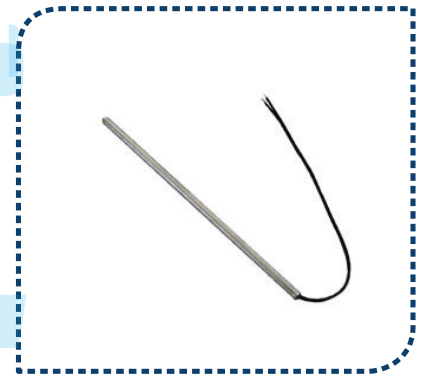

⚙️ Features:

The sensors employ precision interchangeable thermistors and RTD which are compatible with all the major building automation systems.


- Designed for temperature sensing in an HVAC and light industrial control applications
- Precision interchangeability eliminates the necessity for individual circuit calibration.
- Omicron is able to produce custom sensors in small volume at standard sensor pricing

There are several sensor element ranges to choose from, which guarantee compatibility with all popular DDC systems. The sensor elements are precision thermistors or platinum RTDs. Field calibration is not generally required. The probe is epoxy sealed to prevent moisture from migrating into the probe. Custom probe lengths, wire types and sensor elements are available for large OEM projects. Ask about our plastics & metal manufacturing capabilities for custom housings as well.

⚙️ Specifications:

Nominal Resistance	:	R25=10.00kΩ±1%
B Value	:	1000Ω±1%
Optimal Operating Temperature Range	:	-200 ~ +400°C
Platinum temperature sensor	:	P1K0.232.4W.K.010
Tolerance Classes	:	DIN EN 60751 F 0.3 (former Class B)
Extension	:	Wire Connections

⚙️ Dimension:

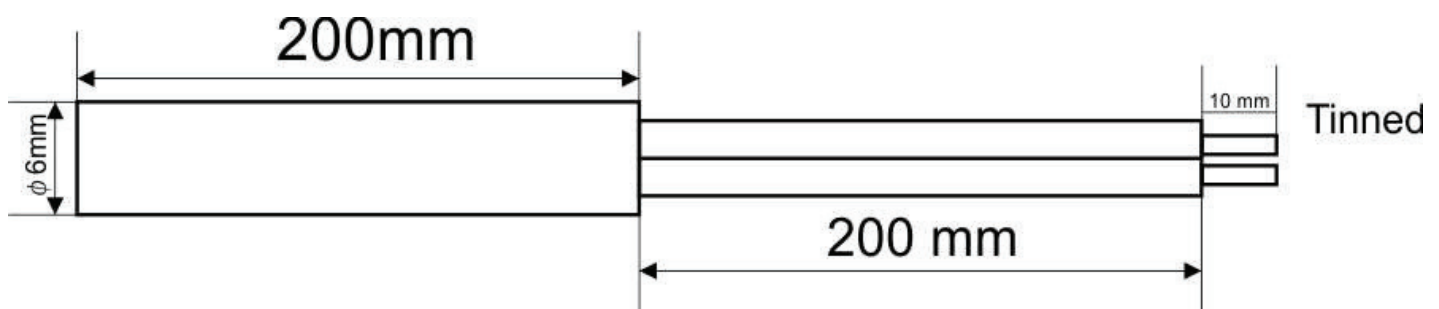

OD6mm X 200mm Probe Temp Sensor

HOW TO ORDER

 **Description:** PRB

PRB Temperature Probe

 **Probe:** 8

8 8inch length stainless steel probe * Other lenghts available,consult factory

 **Temperature Curve:** 7

2	PT-100 3 Wire	5	1.8K Ω Thermistor	6	3k Ω Thermistor
7	10K Ω Thermistor,Type 2	9	100K Ω Thermistor	11	LM334 IC SENSOR
12	PT-1000, 2 Wire	13	Ni-1000,2 Wire	20	20k Ω Thermistor
21	LM335 IC SENSOR	24	100K Ω Thermistor,Type 3		

*Thermistors,pt elements and probe sizes for all popular control systems are available,send us an email if you don't see what you need online.

 **Cable Length:** 8

8 8inch

Ordering Example: PRB - 8 - 7 - 8