

RTD INSERT WITH PLUG & JACK CONNECTOR



Special Features:

- Mineral insulation.
- RTD with adjustable process connection for adjustable insertion length.
- Mineral insulation enables flexibility and Durability.

Applications:

- General industry
- Design suitable for general industry applications for Temperature measurement purposes

Dimensions:

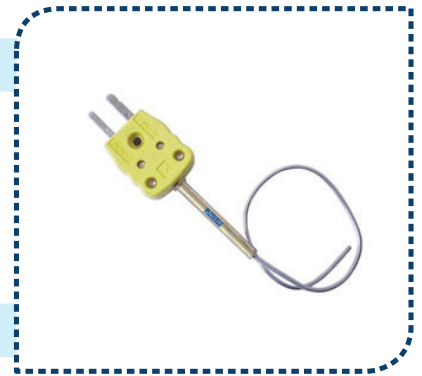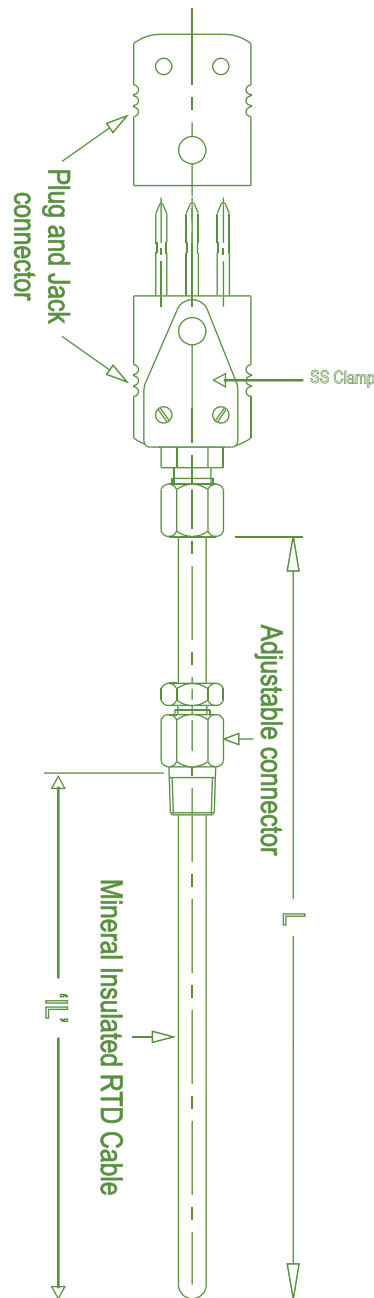

RTD INSERT WITH PLUG & JACK CONNECTOR

HOW TO ORDER

	Basic Model:	RTD012
	S Simplex D Duplex	S
	Element Type:	Pt-100
	Pt-100 Pt - 100 RTD Pt-500 Pt - 500 RTD Pt-1000 Pt - 1000 RTD Cu - 53	
	Temperature Range:	FLM
	FLM -200°C to 449°C CMC 450°C till 600°C	
	Wire Configuration:	3W
	2W 2-Wire Configuration 3W 3-Wire Configuration 4W 4-Wire Configuration	
	Sheath Diameter:	6mm
	3mm 3mm Diameter 6mm 6mm Diameter 8mm 8mm Diameter	
	Cold End Termination:	1
	1 Standard Plug & Jack Connector 2 Miniature Plug & Jack Connector	
	Insertion Length 'IL' / Element Length 'L' mm	L=300
	Specify in mm.	
	Process Connection:	15NM
	15NM ½"NPT(M) adj. connector in SS 316 15NF ½"NPT(F) adj. connector in SS 316 15BM ½" BSP(M) adj. connector in SS 316 15BF ½" BSP(F) adj. connector in SS 316 Other, please specify.	
	Option Description:	PW
	PW Five Point Factory Calibration Certificate SX SS Tag Plate	

Ordering Example :
RTD012-S-Pt100-FLM-3W-6mm-1-L=300-15NM-PW